

THE FOLLOWING PAGE CONTAINS THE CONNECTION DETAILS

It is your responsibility to ensure that the transducer identification matches the connection details, including any RDP modification (T.M) references.

Please ensure that the transducer has not been modified or fitted with a cable or extension.

Particularly on DC-DC powered transducers, incorrect connection may cause **IRREPERABLE DAMAGE** to the transducer which is **NOT COVERED BY WARRANTY**

**IF YOU ARE IN ANY DOUBT PLEASE CONTACT US**




## DCWW SERIES (STD AND OPTION 7 CABLES)



### CONNECTION DETAILS

+ 14 TO + 26V dc
Supply Com. (0V)
Output Low
Output High

**BROWN** ●  
**BLUE** ●  
**BLACK** ●  
**WHITE** ●

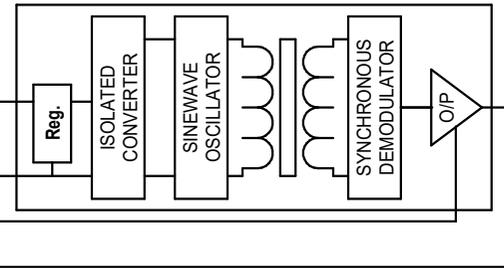

**SUPPLY:** Smooth d.c. voltage 14 to 26V

**OUTPUT:** 0 to 10V nom (See Calibration Certificate)  
(RDP Calibration Supply 24V)

**LOAD IMPEDANCE:** 2k (min) Ohms

**ISOLATION:** 1000V input to output

**PHASING:** Output high positive with respect to output low for outward stroke

**NOTE : INCORRECT CONNECTION MAY CAUSE IRREPARABLE DAMAGE  
CONTACT OUR SALES DEPARTMENT IF YOU REQUIRE ASSISTANCE**

**RDP U.K.**  
**Tel 01902 457512**  
**Fax 01902 452000**



**MADE IN THE  
UNITED KINGDOM**

Doc. Ref. WDUK1800  
ISSUE 5 - 16 OCT 2019

**RDP U.S.A.**  
**Tel 610 469 0850**  
**Fax 610 469 0852**