

THE FOLLOWING PAGE CONTAINS THE CONNECTION DETAILS

It is your responsibility to ensure that the transducer identification matches the connection details, including any RDP modification (T.M) references.

Please ensure that the transducer has not been modified or fitted with a cable or extension.



Particularly on DC-DC powered transducers, incorrect connection may cause **IRREPERABLE DAMAGE** to the transducer which is **NOT COVERED BY WARRANTY**

**IF YOU ARE IN ANY DOUBT PLEASE CONTACT US**

DESPATCH:- INCLUDE CD1023 IF TRANSDUCER HAS NO CABLE FITTED.



## DCWC SERIES (CABLE OPTIONS 6 & 9)

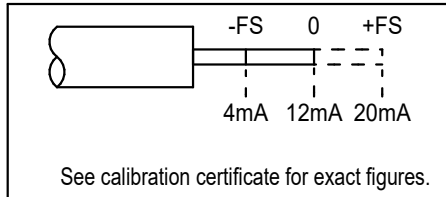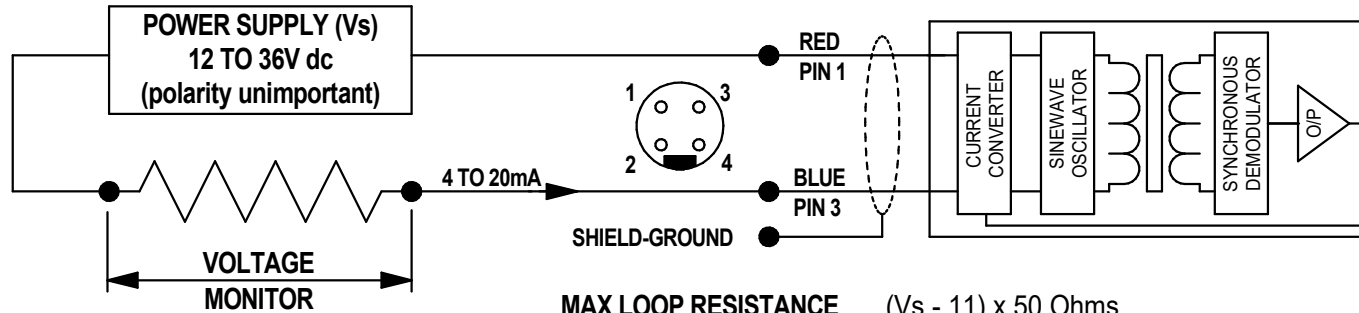

<b>MAX LOOP RESISTANCE</b>	(Vs - 11) x 50 Ohms (Including monitor and cable resistance)
<b>BANDWIDTH</b>	250Hz (flat)
<b>NOISE</b>	50uA peak to peak max
<b>SPAN</b>	TEMPCO 0.03% F.S./°C (Typical)
<b>OPERATING TEMP</b>	-10°C to +70°C
<b>CALIBRATION</b>	24V dc (see calibration certificate)
<b>SUPPLY</b>	Smooth d.c. voltage 12 to 36V

For transducers without cable  
see CD1023 for fitting instructions

**NOTE : INCORRECT CONNECTION MAY CAUSE IRREPARABLE DAMAGE  
CONTACT OUR SALES DEPARTMENT IF YOU REQUIRE ASSISTANCE**

<p><b>RDP U.K.</b> Tel 01902 457512 Fax 01902 452000</p>		<p>MADE IN THE UNITED KINGDOM</p> <p>Doc. Ref. WDUK1903 ISSUE 1 - 16 OCT 2019</p>	<p><b>RDP U.S.A.</b> Tel 610 469 0850 Fax 610 469 0852</p>
--	--	---	--