

THE FOLLOWING PAGE CONTAINS THE CONNECTION DETAILS

It is your responsibility to ensure that the transducer identification matches the connection details, including any RDP modification (T.M) references.



Please ensure that the transducer has not been modified or fitted with a cable or extension.

Particularly on DC-DC powered transducers, incorrect connection may cause **IRREPERABLE DAMAGE** to the transducer which is **NOT COVERED BY WARRANTY**

IF YOU ARE IN ANY DOUBT PLEASE CONTACT US



DCWC SERIES (OPTION 1)

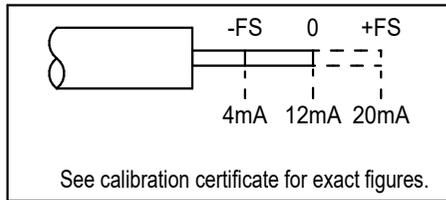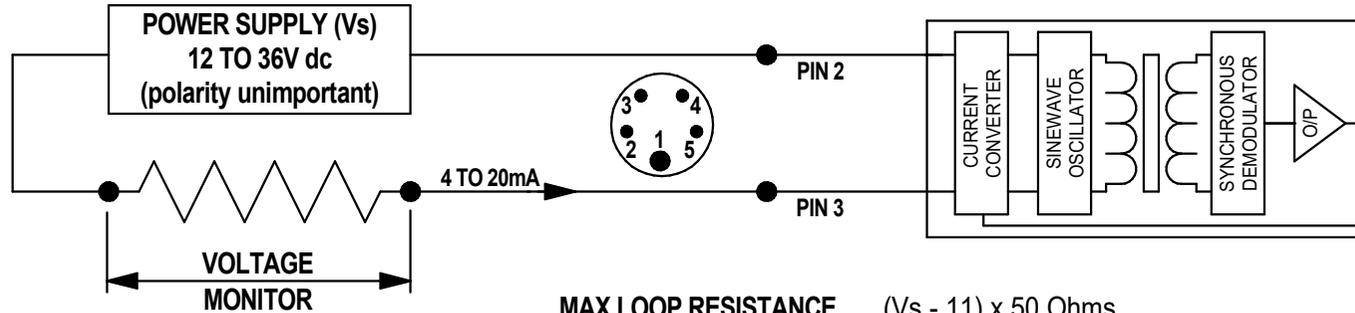

MAX LOOP RESISTANCE	(Vs - 11) x 50 Ohms (Including monitor and cable resistance)
BANDWIDTH	250Hz (flat)
NOISE	50uA peak to peak max
SPAN TEMPCO	0.03% F.S./°C (Typical)
OPERATING TEMP	-10°C to +70°C
CALIBRATION SUPPLY	24V dc (see calibration certificate) Smooth d.c. voltage 12 to 36V

NOTES :

1. EXCESSIVE SOLDERING IRON HEAT APPLIED TO PINS WILL IRREPARABLY DAMAGE TRANSDUCER
2. INCORRECT CONNECTION MAY CAUSE IRREPARABLE DAMAGE, CONTACT OUR SALES DEPARTMENT IF YOU REQUIRE ASSISTANCE

<p>RDP U.K. Tel 01902 457512 Fax 01902 452000</p>		<p>MADE IN THE UNITED KINGDOM</p> <p>Doc. Ref. WDUK1901 ISSUE 1 - 16 OCT 2019</p>	<p>RDP U.S.A. Tel 610 469 0850 Fax 610 469 0852</p>
--	--	---	--